


AUXILIARY CONTROL PANEL

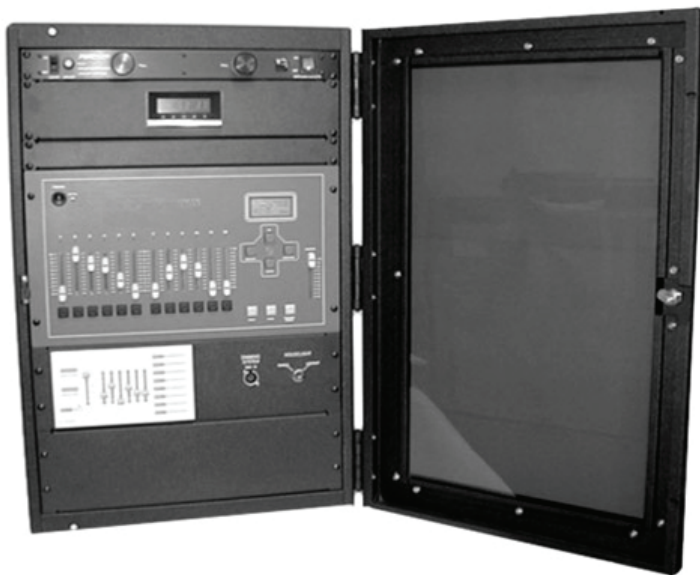

Designed for a broad range of theatrical applications, the auxiliary control panel has been developed to complement and complete the design of any control system.

The rugged enclosure with locking door will stand up to the most rugged installations and includes a locking door. The enclosure features dimmable worklights and a fully featured clock with timer functions.


AUXILIARY CONTROL PANEL

FEATURES

- Built-in, dimmable operating lights
- 301 Back-up console with timed event mode, 144 cue back-up mode and manual operation with 512 dimmer patch
- Available with optional architectural control station with faders and presets for houselight and worklight control with keyed lockout
- Digital Clock with stop watch functions
- DMX512 console input connector
- Locking door with plexiglass insert
- Simple to install and locate in any production facility
- Standard 3U 19" blank panel for use with audio/intercom contractor

ENVIRONMENT		°C	°F
Operating temperature		0 to 35°	32 to 95
Humidity		5-95% non-condensing	
Storage temperature		-40-70	-40-58
PHYSICALS			
Construction		Formed Steel Assembly	
DIMENSIONS		mm	in
H x W x D		787.4 x 523.9 x 469.9	31.0 x 20.625 x 18.5
WARRANTY & APPROBATIONS			
Warranty		2 years	
Approvals / Listings		CE	

AUXILIARY CONTROL PANEL

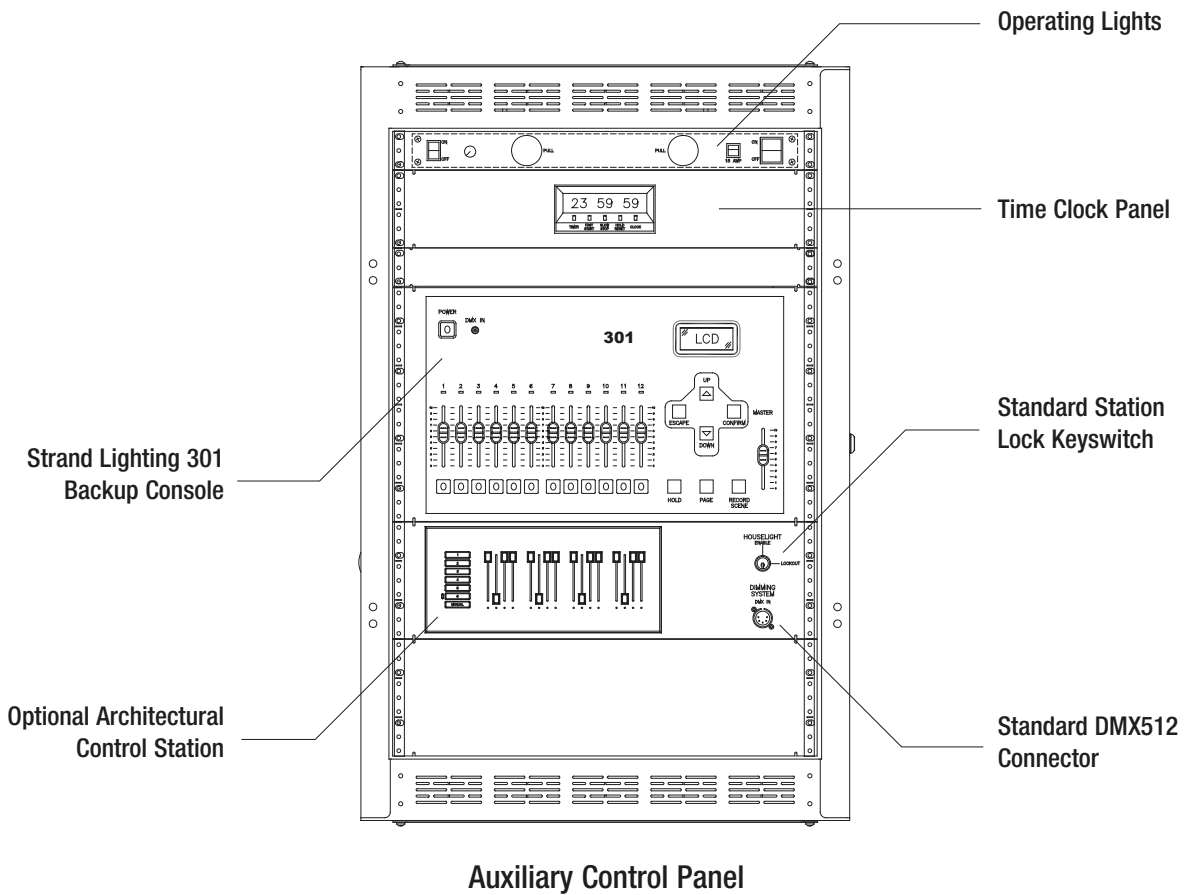

PRODUCT NAME	ORDER CODE
3200-5600K Auxiliary	95995

© 2024 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: 95995-100-00