

# SL PUNCHLITE 220

Date: \_\_\_\_\_

Type: \_\_\_\_\_

Firm Name: \_\_\_\_\_

Project: \_\_\_\_\_

The innovative and large motorized zoom range of 8-40° delivers flexibility to your lighting design. The honeycomb lens design maximizes the light emitting surface and delivers a powerful blended output. The effective passive cooling design delivers uncompromised saturated color performance. Ideal to highlight performers, objects or building elements with a narrow shaft of light, or flood a wide area with a powerful wash of color.



- Double yoke for floor standing or hanging.
- Silent passive cooling.
- Harmonize color calibration.

- Outdoor rated (IP65) power and DMX connections - Rated against water spray from any direction, providing weather protection.

For detailed product information, please refer to the Product Guide at <https://www.vari-lite.com/global/products/sl-punchlite-220>



## VARI\*LITE

# Specifications

Due to continuous improvements and innovations, specifications may change without notice.

## Source

LED	18 x Quad chip RGBW or RGBA
Source Max Power Consumption	18 x 10 W
Dimming	Electronic 8-bit / 16-bit
Dimmer Curves	Square Law (Default), Linear, S -Curve
Strobe Speed	0 - 30Hz
Strobe Modes	Continuous, Random, Random Sync

## Optical Performance

Lens Size	212 mm (8.3 in)
Zoom Range	8 - 40°
Zoom Control	Motorized 8-Bit
Output Lumens	3500
Default Color Output Color Temperature	
	6500 K (RGBW Version White Only LED Only)
CRI RA	> 90

## Color System

Additive Color Mixing	RGBW
Color Mixing Control	RGBW 8-bit, RGBW 16-bit, HSIC
Color Calibration	Selectable On/Off
Preset CTT Levels (10)	2700 to 10,000k
Color Presets	32 Calibrated Colors (RGBW Only)
Color Wheel Effects	Color Preset Chase

## Electrical

Max output Power	230 W
Consumption	
Power Connection	Captive True1 compatible In/Thru cables, IP65, 490mm (19.3 in) True1 compatible input connector included
Input Voltage	100–240 VAC, 50 / 60 Hz

## Data

Supported Protocols	DMX-512A (RDM)
DMX Modes	
16-Bit	18 / 34 Channels
8-Bit	11 / 19 / 21 Channels
HSIC	11 / 21 Channels
Simple 8-Bit	8 / 16 Channels
Data Connections	Captive 5-Pin XLR In/thru cables, IP65, 490mm (19.3 in)
Zone Control	1 / 3 Pixels
Manual Mode	On Board local Control

## Noise Level / Fan Control

Cooling System Type	Convection
---------------------	------------


## Mounting

Yoke / Feet Type	Double clutch locking yoke >270° Swivel Yoke M12 (1/2") Centre hole
Fixture mounting/Hanging orientation	Hanging - Floor - Side
Secondary Safety Wire Point	1 x Safety point located on body of fixture Safety Wire not included

## Photometrics and IES Files

For IES files and photometric reports, please refer to the product page:  
<https://www.vari-lite.com/global/products/sl-punchlite-220>

# Dimensions

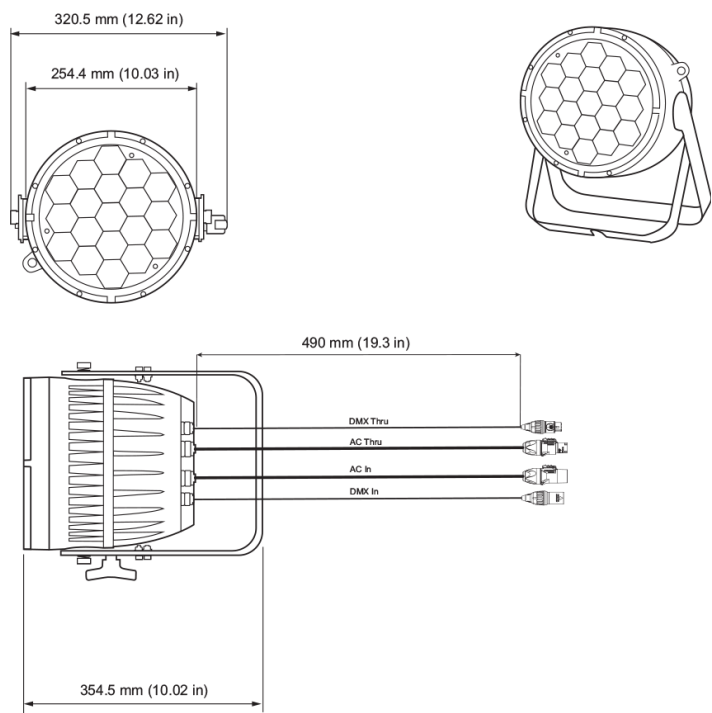

## Physical

Construction	Superstructure made of Aluminum, and steel metal plates, Covers Aluminum
IP Rating	IP65
Standard Finish	Black
Dimensions	254 x 320 x 252 mm (10.0 x 13.0 x 10.0 in)
Fixture Weight	10.0 kg (23.0 lb)
Operating Temperature	-10-45°C (14-113°F)

## Certification and Safety

Approbations	CE, C-Tick/cETL, UKCA
--------------	-----------------------

# Luminaire and Accessories

Product type	Order Code
SL PUNCHLITE 220, RGBA	SLPUNCHLITE220A
SL PUNCHLITE 220, RGBW	SLPUNCHLITE220
Accessories	
Accessory Holder	89-020-6090-00
SL PUNCHLITE 220, Accessory Holder, Black	
Top hat	28-002-1450-00
SL PUNCHLITE 220, Top hat, Black	



© 2024 Signify Holding. All rights reserved. All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.